

Systematic review in scientific Scopus base of improvement solutions in soils with expansive clays.

María Chucuyán-Pérez¹, Joselyne Solórzano^{1,2}, Paúl Carrión-Mero^{1,2*}

¹ Facultad de Ingeniería en Ciencias de la Tierra (FICT), ESPOL Polytechnic University, ESPOL, Campus Gustavo Galindo, Km. 30.5 Vía Perimetral, Guayaquil, 090902, Ecuador

² Centro de Investigación y Proyectos Aplicados a las Ciencias de la Tierra (CIPAT), ESPOL Polytechnic University, ESPOL, Campus Gustavo Galindo, Km. 30.5 Vía Perimetral, Guayaquil, 090902, Ecuador

Corresponding Author Email: pcarrion@espol.edu.ec

Copyright: ©2024 The author(s). This article is published by IETA and is licensed under the CC BY 4.0 license (<http://creativecommons.org/licenses/by/4.0/>).

<https://doi.org/10.18280/ijdne.xxxxxx>

ABSTRACT

Received:

Revised:

Accepted:

Available online:

Keywords:

clays, soil quality, swelling, humidity and clay minerals.

Significant economic losses and disasters have been recorded worldwide in constructions on soils with clayey minerals due to their low rigidity and resistance. Expansive clay soils in wet conditions have been problematic for civil engineering, especially in heavy structures, increasing improvement costs and time. This research endeavours to analyse the solutions applied to improve the quality of expansive clay soils through the systematisation of information published in the Scopus scientific database, co-occurrence map of keywords, methodological trends, and systematic review for the identification of current pinpoint lacunae and promising avenues for future study. The methodological approach revolves around employing thematic descriptors of expansive clays and soil improvement, applied to the Scopus scientific database, and the analysis statistically applying Vosviewer software, enabling the identification of the primary relationships between countries and researchers. This aim will also encompass the contribution of methodologies for adequately addressing this problem. Subsequently, the Preferred Reporting Items for Systematic Reviews and Meta-Analyses (PRISMA) method was applied, focusing on a systematic review of case studies. The analysis of scientific production revealed an increase in publications during the final period (2015-2023), which included methods implemented for soil improvement. Eco-friendly binders such as stabilisers with residual fibre mixtures, jet grouting, biopolymers, geopolymers, biotechnology, and organic and inorganic materials stand out. China and the United States lead the way in scientific publications due to the high content of clayey soils and the population growth in these countries. Within the systematic review, the use of the chemical method with a predominance of lime showed up in almost all the case studies, increasing the compressive and tensile strength of the material. This research establishes a comprehensive and specific analysis of conventional and current soil improvement methods while defining the growth in future study topics, such as implementing waste materials, recycled polymers, and alternative ecological binders aligned with infrastructure stability.

1 INTRODUCTION

Clay is one of the different types of predominant soil on the Earth's surface [1]. It has been used in engineering, cosmetology, and the pharmaceutical industry since prehistoric times [2]. Clay is composed of very fine (< 2 microns) and crystalline particles [3]. It is characterized as soft soil with a high plasticity index, low permeability, and low bearing capacity [4], making it prone to significant deformations. Due to its geotechnical characteristics, this type of soil generates problems in construction, especially when it meets water [5], causing significant disasters and economic losses. For instance, on August 28, 2017, in the village “Pusa” located in Guizhou, China, a landslide, which was approximately 8600m³ of soil resulting from rainwater

infiltration, killed 35 people [6].

A significant portion of the United States exhibits swelling and shrinking characteristics in soils, which inflicts expensive harm on various structures like foundations, residential buildings, roads, airfields, and embankments; in contrast, with the destruction caused by natural events such as earthquakes, hurricanes, or tornadoes. [7]. According to the Virginia Department of Mines, Minerals and Energy, in 2021, it was estimated that around 12.5% of households encountered damage to their infrastructure [8]. Expansive clays, which contain hydrophilic minerals like montmorillonite and illite, are prone to changes in soil volume are influenced by the number of smectite minerals present. [9]. The triggering factor for this type of soil is climatic fluctuations, as wetting and drying cycles caused by climatic fluctuations cause swelling

and contraction [10]. The high plasticity index (PI), low permeability, compressibility, differential settlements, and low shear strength [11] cause damage to structures built on expansive clays. Soil improvement commonly refers to enhancing of the engineering properties of soils through mechanical, chemical, thermal, and electrical methods [12]. Replacing soil with expansive clays influences costs and operation times due to earthwork, machinery, and personnel. Therefore, the continuous goal of geotechnical engineers is to improve rather than replace it [12], using different alternative binders [13], such as the use of recycled materials, as reflected in the increase in scientific research [14]. In Jombang, East Java, Indonesia, in 2021, a soil improvement study with expansive clays was carried out, using a mixture of oyster shell ash as a stabilising agent, reducing moisture, plasticity index (PI), and montmorillonite content [15]. In Curitiba, Brazil, rice husk fibre was used as a stabilising agent to analyse the mechanical behaviour of the soil [16]. Additionally, numerous studies have emphasised the effectiveness of the Deep Mixing technique, as demonstrated at the East Port Said Port in Egypt. In this case, using lime and cement binders through the Deep Mixing method reduced the PI, increased the liquid and plastic limits, and enhanced the clay's compaction properties [17].

The increasing urban population is forcing communities to occupy land not traditionally considered suitable for construction, such as expansive clays [18]. A study case of this problem is in the urban land southeast of Madrid, where the improvement technique was expansive clay and lime (6%) for the construction of an embankment, which allowed for the area's urban development. Another case study is the research conducted by Yahgoubi [18] in the western metropolitan area of Melbourne, Australia, where an improvement was made to the subgrade of a road on expansive clay soil using recycled glass. Over time, research on soil improvement techniques has existed; however, only some studies have performed bibliometric analysis [19], [20] and systematic review. The number of research papers published in databases such as Scopus allows for evaluating the latest advances and relevant information in practice on a specific topic [21]. Bibliometric analysis collects many scientific articles in a comprehensive database such as Scopus or Web of Science (WoS), revealing research patterns such as influential publications, authors, important journals, and relevant information in a particular area [22], [23]. It also identifies research gaps in different disciplines [24], [25].

A systematic review, a cornerstone of academic research, is particularly significant in the context of soil improvement in expansive clays. It compiles data and analyses a specific topic, ensuring transparency and objectivity [26]. One of the applied methods applied in this context is the Preferred Reporting Items for Systematic Reviews and Meta-Analyses (PRISMA), a tool that aids researchers in producing high-quality reports through its guidance, comprehensive updated checklist, and flowchart template [27]. Based on the preceding, the following research questions are formulated: What are the research trends in studies that link soil improvement with expansive clays? Which geographical areas are affected by instability in soils with expansive clays? And how have soil improvement techniques in expansive clays evolved? In response to these questions, the study seeks:

- To analyse the solutions applied to soil improvement in expansive clays.
- Systematisation of information published in scientific databases, co-occurrence maps of keywords (Study

clusters) in Vosviewer and methodological trends in Bibliometrics.

- A systematic review of case studies related to soil improvement in urban areas, using PRISMA, for constructing a matrix that synthesises the primary factors and methodologies.

2 MATERIALS AND METHODS

This study employed a methodological approach that included statistical analysis of research trends in soil improvement with expansive clays. In geotechnical engineering, this problem is frequent, and there are several ways to approach solutions that improve the characteristics and quality of the soil. A literature review is considered an essential contribution to research, minimizing biases and errors in selecting a field of knowledge [28]. This type of secondary research recognises possible gaps and highlight current lines of research with the application of solutions and research trends. Bibliometric studies use quantitative analysis to describe, evaluate, and monitor the scientific field of an area, identifying trends and growth of a topic [21], [29], [30]. For this research, a search was conducted in the Scopus database as a general analysis, focusing on case studies (Figure 1).

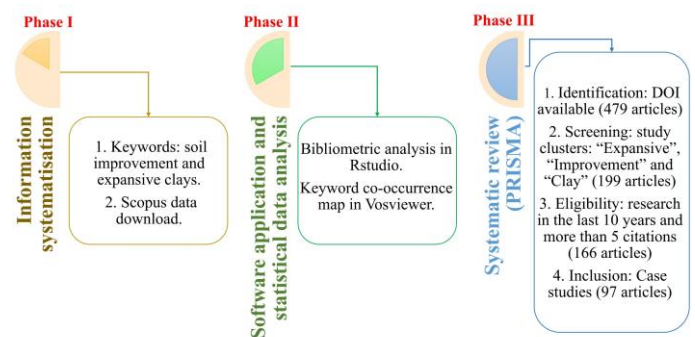


Figure 1. Methodological framework with a general and case study-focused approach.

2.1 Phase I: Systematisation of Information

The articles on soil improvement in expansive clays were reviewed through the Google Scholar database, which identified keywords and their synonyms. Subsequently, using Scopus database on January 8, 2024, Boolean operators were used to refine results, as shown in the following equation: ((TITLE-ABS-KEY ("expansive clay") OR TITLE-ABS-KEY ("expansive clay soil") OR TITLE-ABS-KEY ("clay soil*") OR TITLE-ABS-KEY ("expansive clay improvement*")) AND ((TITLE-ABS-KEY ("soil improvement*") OR TITLE-ABS-KEY ("improve soil*") OR TITLE-ABS-KEY ("soil treatment*") OR TITLE-ABS-KEY ("soft soil improvement*")))). The database was downloaded in plaintext and .csv format.

2.2 Phase II: Software Application and Statistical Data Analysis

With the Scopus database, cleaning and removing incomplete data was carried out. The database was processed using RStudio, a programming language software. Its

Bibliometrix platform allows the generation of multiple maps and diagrams with statistical analysis for bibliometric analysis, such as international collaboration graphs and keyword trends. In Microsoft Excel, the growth analysis of scientific production was performed. In ArcGIS (version 10.3), the geographical distribution of scientific publications was carried out, and in Vosviewer version 1.6.17, the keyword co-occurrence map.

2.3 Phase III: PRISMA Systematic Review

Based on the bibliometric analysis, the research focus of the PRISMA method consisted of four stages. The identification stage considered articles with DOI for detailed review; in the screening stage, the analysis focused on articles that presented the clusters of soil improvement and expansive clays in their keywords. In the eligibility stage, the database was limited to documents with more than five citations and published in the last ten years. In the inclusion criteria, the publications were limited to case studies; finally, the inclusion stage selected case study publications. The systematic review generated a synthesis scheme based on the relationship between the method applied for the improvement and the improvement properties with the technical criteria, defining guidelines and lines for future research.

3 RESULTS

3.1 Scientific Production, Annual Citations, and Document Types

As shown in Figure 2, it experienced a steady growth in publications from 1925 to 2023. This study divided the publications into three periods, considering the frequency of documents and citations (Table 1). Initial Period (1925-2000), Intermediate Period (2000-2015), and Final Period (2015-2023). Among the document types published within the thematic area, scientific articles stand out, followed by conference papers and book chapters. In 2021, a peak in production was observed, mainly with topics related to the mixture of silica and eggshell ash to stabilize and improve the engineering properties of soil (decrease in specific gravity, IP, and increase in moisture content and undrained shear strength) [31]; application of biochar [32] and improvement of expansive clay soils using recycled concrete cement [33].

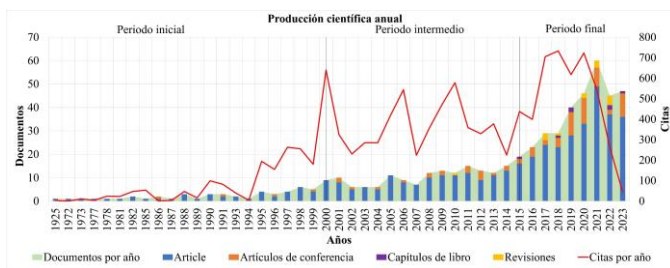


Figure 2. Annual scientific production, specifying document type and number of citations.

Table 1. Division of study periods in bibliometric analysis.

Study periods analysis	Main content
------------------------	--------------

Period 1925-2000 (start point)	Soil improvement in agriculture using mechanical methods with a milling machine [34], clayey soils with saline patches in crops [35], reinforcement using Jet Grouting to counteract softening of clayey soil, fissure and instability [36], the load-bearing capacity of improved soils using sand compaction piles in a series of centrifuge tests [37], binders such as fly ash, vertical drains to gain strength in soft clayey soils [38], rice husk ash decreases swelling behaviour, IP, California Bearing Ratio (CBR) value and shear strength [39].
Period 2000-2015 (middle point)	Utilization of lime [40], comprehensive study of the behaviour of stabilized expansive clays for sulfate-rich soils using as stabilizers, class F fly ash, type V cement, granulated slag and lime mixed with polypropylene fibres [41], compaction grout test platforms to quantify changes in moisture content, density, compressive strength and collapse potential [42], lime piles with significant changes in Atterberg limits, compaction, linear shrinkage and strength of the treated soil [43].
Period 2015-2023 (final point)	Soil stabilization with chitosan from shrimp shells showed an increase in soil particle interaction and improved mechanical properties [44], the combination of vacuum preloading and lime treatment to improve dredged fill increased the shear strength of all soil layers and consolidation rate [45], soil improvement in expansive clays with plant fibres (crushed) reduces swelling and increases cohesion [46], voltage optimization in expansive soils with saline solutions at different voltages, and improvement of expansive clayey soil with non-traditional binders such as biomass ash and silica-based nanotechnological stabilizer [4].

3.2 Study clusters based on keywords

Figure 3 allows for identifying of research topics and methodological trends in soil improvement based on the density distribution of the co-occurrence network of the authors' keywords. In this analysis, a frequency of five was considered in each term, defining six clusters of interest.

The "Laboratory Tests" cluster, denoted by the colour red, is a vast and fertile study area boasting nine nodes and 30 links. It is a hub of research activity, with each node representing a unique aspect of soil improvement. This cluster is linked to a diverse range of tests, from determining the geotechnical properties of clay with silica nanoparticles [47], to studying the influence of rice husk ash and lime on the properties of the clayey subgrade [39] and, exploring the effects of geosynthetic reinforcement on the bearing capacity of continuous footings [48]. It also encompasses research on soil improvement with sand, lime, and polypropylene fibres [49].

The green cluster, "Geotechnical Properties" has eight nodes with topics related to the improvement of the geotechnical properties of expansive clayey soils through the swelling-shrinkage behaviour improved by applying nanosilica, calcium carbide leftovers and geopolymer [50], [51], and the use of coconut fibres, granular piles with and without geomembrane lining, and electrokinetic treatment to improve the bearing capacity and strength of expansive clay [52], [53].

The blue cluster, known as "Ecological Binders", is essential in this research. It encompasses seven nodes, each delving into topics related to the most common types of

binders and their derivatives that are used for the improvement of clayey soils, such as eggshell lime, rice husk ash (Muntohar et al. 2000; Tonini de Araújo et al. 2021), characterization of strength, durability and microstructures of clayey soils enhanced with sustainable geopolymers [56]. Additionally, it explores the geotechnical properties of clayey soils improved with marble and granulated slag" [55], [56].

The yellow cluster, aptly named "Soil Quality", reveals the practical implications of this research. This analysis found that urban waste, sewage sludge, and sawdust in semi-arid areas can enhance the physical properties of the soil, including hydraulic conductivity, water retention capacity, density, porosity, soil strength, and aggregate stability [59]. Furthermore, this study demonstrates that organic matter can significantly improve soil structure, quality, and productivity [60]. These findings directly impact the management of soil sustainability in semi-arid regions.

The purple cluster, "Soil Properties", mentions the combination of vacuum preloading and lime treatment to improve the technical properties of fill, such as shear strength and permeability [61], and the use of nano-bentonite to improve the technical properties of the soil (increase in the consolidation coefficient and permeability, reduction in the compressibility of clayey soil and facilitation of soil particle cementation) [62].

The light blue cluster, "Soil Improvement Techniques", highlights microbially induced calcite precipitation (MICP) for biological soil improvement (reduction of liquid limit and IP) [63], the use of biogrouting and the electrokinetic method to stabilize marine soil (improvement in soil shear strength and reduction in compressibility and electrical conductivity) [64].

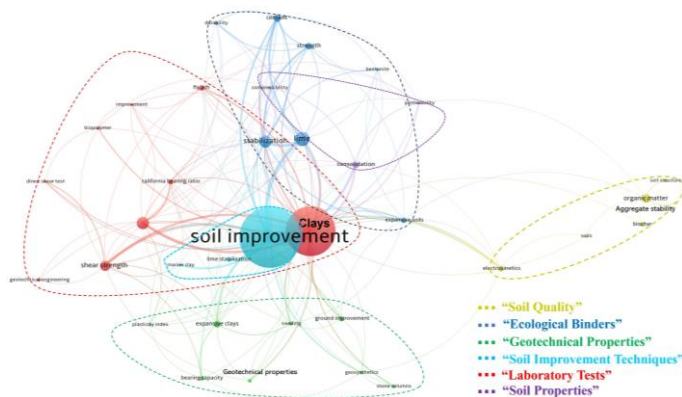


Figure 3. Study clusters with an occurrence frequency of five, generated using Vosviewer software.

3.3 Geographical distribution of scientific publications.

In the cluster analysis based on the geographical distribution of publications (Table 2), 29 countries were identified with significant growth in topics related to soil improvement in expansive clays.

Cluster 1 studies topics on mechanisms for removing contaminated soils and sediments with hydrophobic organic compounds [65] and improving soil aggregate stability with biochar through slow pyrolysis, hydrothermal carbonization, or torrefaction [66]. Cluster 2 relates to topics on settlement control using Deep Mixing in clayey soils [67], where polymers were used [44], [68] and the use of carbon dioxide to improve clay behaviour [69]. In Cluster 3, China was the

most influential country, with 70 articles published, with topics regarding the application of the Deep Soil Mixing method to reduce the impact on nearby structures [70] and the improvement of clayey soils with microbially induced calcite precipitation.

In Cluster 4, the United States stands out, with topics related to the stabilization of clayey soils with a high organic matter content [71], [72] and the behaviour of stabilizers such as recycled glass, coconut fibers, and aqueous polymer [18], [73]. Cluster 5 presents research on the application of binders such as hydrated lime in the treatment of marine clays, coconut fibers modified with calcium hydroxide and magnesium nanoparticles, and steel waste dust [74]–[76]. Cluster 6 highlights Canada and Singapore with topics such as the mechanical behaviour and prediction of the vertical yield stress of clayey soil, using lime or cement as a stabilizing agent [40] and low-concentration alkali cement based on fly ash [77].

Table 2. Cluster of the relationship and distribution of countries based on their scientific publications.

Cluster	Country	Amount of documents	Amount of citations
1	France	11	501
	Sweden	10	177
	Italy	9	214
	Algeria	8	72
	Netherlands	8	229
	Jordan	6	44
	Saudi Arabia	5	28
2	Iran	50	1069
	Brazil	26	717
	Egypt	14	333
	Japan	11	299
	Romania	5	9
	Russian federation	6	10
3	China	70	1354
	United Kingdom	23	751
	Germany	10	252
	Pakistan	6	132
	Poland	5	256
4	United States	69	2328
	Australia	38	982
	India	36	316
	South Korea	8	380
	Nigeria	7	71
	Turkey	33	510
5	Malaysia	28	350
	Indonesia	20	133
	Irak	13	193
6	Canada	22	923
	Singapur	5	165

3.4 Topic trends using author keywords.

Figure 4. Thematic trends from 2002 to 2023, considering a frequency of 5 in author keywords. allows us to identify the evolution of keywords in soil improvement, based on the frequency with which they are cited over a period. The database was processed in the Bibliometrix software, where the predominance of the words "soil," "clay soils," and "consolidation" as the most representative and long-lasting themes is evident.

Between 2000-2020, a burst of keywords emerged related

to the application of sludge and fertilizers to improve soil properties and hydraulic conductivity [78], organic waste to improve soil structure [60], [79] electrokinetic bioremediation with phenanthrene in clayey soils [80], vertical drains [81], lime treatment in clayey soils [72], carbon sequestration to improve soil quality [82], granular fill layers [83], electrokinetic consolidation with electroosmosis principles used in the treatment of fine-grained soils such as silts and clays [84], industrial waste [85], vibrodisplacement gravel columns [86], and MICP nanomaterials as a promising technology for biological soil improvement [63].

In recent years, methodological approaches have focused on biogrouting through physical, biological, and chemical treatments to the soil [64], biochar improves hydraulic properties [87], recycled concrete aggregates, tire polymer fibers, and glass improve strength properties [68], fibers that increase ductility, tensile strength of improved soils, and delay the rupture process [88], biocementation through the addition of eggshell [89], cementitious jet grout method (CJG) for the reinforcement of building foundation soils, reducing the potential for settlement, permeability, and liquefaction [90], fly ash-based geopolymers as an eco-friendly alternative binder [91], recycled polymers [92], and glass fibers with nanoclays that increase shear strength parameters. [93].

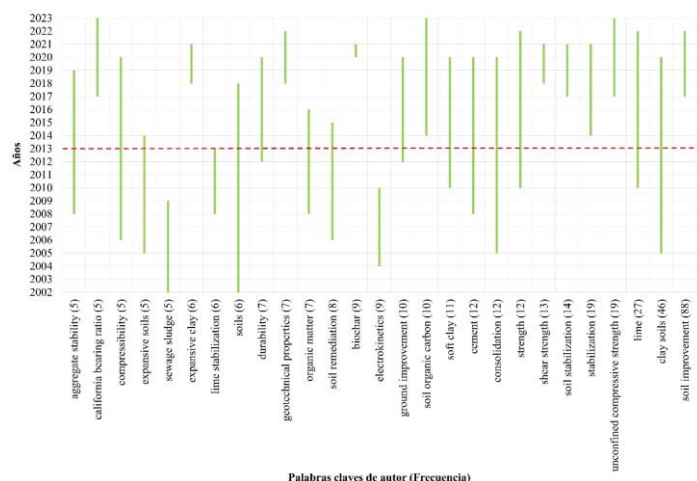


Figure 4. Thematic trends from 2002 to 2023, considering a frequency of 5 in author keywords.

3.5 Systematic review

Based on the four criteria established in the systematic review, 97 publications were identified for the exhaustive synthesis of information, considering methodologies, geographical location, and soil improvement properties. Considering the case studies where soil improvement was carried out, five groups could be divided based on the methodologies applied (Figure 5). The chemical method with 31 publications, in Italy, Brazil, Turkey, Japan, Indonesia, Pakistan, China, Malaysia, Algeria, Australia, Iran, and India; the mechanical method with eight publications, in Algeria, Malaysia, Iran, India, and China; the thermal method with two articles in Syria and Brazil; the physicochemical method with one article in Iran; and finally, the analytical method with one article in Morocco.

3.5.1 Chemical method

Sure, here is the translation of the Spanish text to English:

Among the main themes based on the number of citations, which encompass the application of the chemical method, is the introduction of potassium chloride (KCl) solutions through perforations, such as the case of Italy, where an increase in the angle of friction and shear strength was observed due to the propagation of ions (increase in ionic concentration). In Brazil, the publications focused on studying the effect of geotechnical properties by adding lime, improving compressive and tensile strength. Among the methodologies, the injection of clay nanoparticles in the improvement of collapsible soils also stands out, as is the case in Iran, where the collapse index was reduced by up to 96% and the mechanical behaviour of low-permeability soils was improved, becoming an economical and ecological technique. In the African continent, Algeria stands out with the study of the stabilization of clayey soil with gypsum content, using lime as a stabilizing agent, increasing compressive strength, improving soil stiffness, fragility to deformations and modulus of elasticity.

3.5.2 Mechanical method

The Asian continent, particularly China, stands out for its use of the mechanical method. There, the vacuum preloading, and surcharge method was studied to improve soft marine clay, resulting in a reduction in deep lateral displacement, water content, compression coefficient, an increase in compression modulus, cohesion, and friction angle. Additionally, research has been conducted on the use of the vacuum preloading method without sand combined with short and long prefabricated vertical drains (PVDs), achieving a more uniform shear strength profile, indicating that this proposed method is more effective than the conventional one. In Algeria, the geotechnical and mineralogical properties of clayey soil treated with dune sand were studied through laboratory tests, swelling oedometric tests, and X-ray diffraction (DRX), resulting in an improvement in geotechnical characteristics.

3.5.3 Thermal method

A case study is presented in Syria, where the use of thermally treated clay as a stabilizing agent decreased the PI by increasing the percentage of thermally treated clay, the natural soil swelling pressure, and linear shrinkage deformations; and the technical properties of the soil were improved by the creation of cementing phases. And in Brazil, the temperature sensitivity of soil organic matter decomposition was analysed in the addition of different biochar rates, observing a decrease in CO₂ emission.

3.5.4 Physicochemical method

In Iran, the effects of wetting and drying cycles on the swelling-shrinkage behaviour of expansive soils improved by nanosilica and industrial waste were studied, demonstrating that the improved samples have fewer swelling and shrinkage variations under the influence of water content changes.

3.5.5 Numerical Modeling Method

Some studies carried out in the Bouregreg Valley, Morocco, were focused on ground improvement using gravel columns using numerical simulations and analytical methods. The study focused on comparing the behaviour of an isolated central gravel column with a group of gravel columns to gain insights into the interactions between the columns under

various parameters related to the granular material and the surrounding soil. Constitutive models (Mohr-Coulomb) and finite element models (FEM) were employed using PLAXIS 3DF software, along with the Priebe method and the equilibrium method.

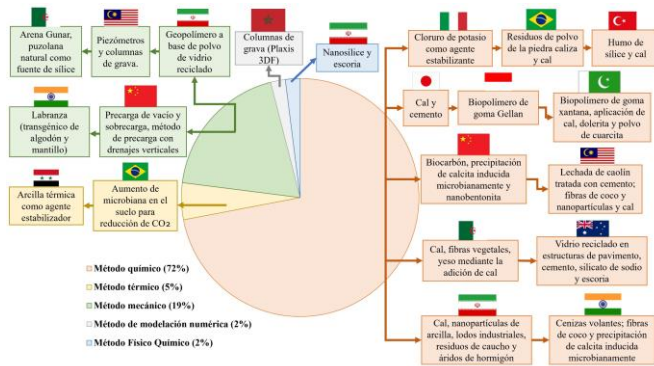


Figure 5. Summary of a systematic review based on case studies, defining five soil improvement methods.

4 DISCUSIÓN

Publications in the field of soil improvement have evolved over time. It began 99 years ago with topics related to agricultural soil improvement [34], [94]. The second period (2000-2015) focused on topics like the effects of compost made from urban waste and sewage sludge on the physical properties of clay soils [59], removing metal contaminants [95], and controlling the strength of lime-stabilized soils [96]. In the final period (2015-2023), publications have grown exponentially, averaging 42 documents per year (Figure 2). Topics include the use of polymers and different types of fibers like glass [68], natural fibers, polypropylene, and coconut [53], [97]. Scientific production peaked in 2021 (Figure 2) with 60 published articles. China published the most articles (18) on using stabilizing agents like biochar [98]–[100] and inorganic materials: geopolymers [101], polymers [102], and inorganic amendments [100].

The cluster analysis of study topics shows the "soil properties" cluster within the "Ecological Binders" cluster, like the combined use of fly ash-stabilized clay columns [103] and kaolin grout [104] to improve compressive strength. The "Laboratory Tests" cluster directly relates to the "Improvement Techniques" cluster, highlighting the importance of characterizing soil type for improvement, as in the study of strength and swelling characteristics of expansive soils treated with calcium carbide waste [105].

Studies on this research topic have grown over time, with 125 authors (who published at least twice) in 27 countries. China and the United States have the highest number of publications. As developing countries with large populations [106], they experience increased industrialization, urbanization, fertilizer use, and intensive soil consumption, leading to greater environmental pollution [107]. China has red soils like latosols with a clayey structure and high water retention capacity [108]. Therefore, one of the places with the most publications is Nanjing and Jiangsu, located along the Yangtze River axis. This area has clay, silt, sandy soil, clay minerals, high moisture content, and density [109], with research on fiber-reinforced and geopolymer-stabilized soils [101]. In the southwestern United States, there are Alfisols, Mollisols, and Entisols soils [110], [111]. Studies were

conducted on the effect and particle size of biochar in water for plants in sandy, silt loam, and clay soils[87].

The graph of trending topics (Figure 4) shows that "CBR," "Soil Organic Carbon," and "Unconfined Compressive Strength (UCS)" are the dominant keywords in 2023. This reflects the current focus on finding sustainable and eco-friendly soil improvement techniques using renewable organic materials. Researchers measure UCS and bearing capacity to determine if these organic stabilizing agents have a positive impact on soil.

"Clay Soil," "Consolidation," and "Soils" have consistently remained relevant topics throughout the period (2002-2023). This is due to urban sprawl in various countries, which leads to construction on problematic soils like expansive clays. Urban planning projects often involve fine-grained soils like clay, which are difficult to consolidate [112] and have low bearing capacity and high compressibility [113]. This has driven geotechnical engineers to constantly research and develop methods for improving these properties.

According to this secondary research, which involved a bibliometric analysis and systematic review, mechanical soil improvement methods require large, specialized machinery, resulting in significant financial costs. However, the literature shows a growing emphasis, particularly in the final period (2015-2023), on studies of ecological stabilizing agents. These agents improve soil properties (stability, grain size, plasticity index, swelling-contraction potential, and cementation), reduce improvement costs, and offer more environmentally friendly approaches.

This review provides a baseline understanding of the studies and methodologies applied to soil improvement under various conditions and challenges. It highlights the diverse countries that have conducted research and implemented solutions to ensure the stability of structures, demonstrating that clay soils can be adapted and mitigated for use worldwide.

This study analysed publications in the Scopus database. However, some articles indexed in databases like WoS, Dimensions, or Google Scholar were not considered. The search downloaded all soil improvement studies, identifying articles with various applications and study types, including those focused on soil improvement for agriculture or experimental cases that were analysed generally.

5 CONCLUSIONS

The review of publications about soil improvement in expansive clays identified 543 documents from 1925 to 2023 with exponential growth, highlighting 2021 with publications from China on using biochar as a stabilizing agent. Cluster analysis and trend topics showed an increase in recent years of using stabilizing agents (mainly fly ash, slag, polymers, lime, and cement) with residual fibers (glass, coconut, and rubber) in soil improvement methods. These agents improve properties like bearing capacity, plasticity index, tensile strength, and swelling-shrinkage behaviour, which are crucial for expansive clay soils.

X-ray diffraction (XRD) is highlighted for identifying clay minerals and complementing geotechnical characterization. The main tests used to demonstrate soil improvement are unconfined compressive strength (UCS), Atterberg limits, California bearing ratio (CBR), consolidation, and oedometer tests. China and the United States lead in the geographical distribution of publications, focusing on biochar and organic

soils due to their high content of expansive clay soils, a major challenge in construction.

The systematic review focused on case studies of soil improvement, with the chemical method prevailing as a more economical option compared to the mechanical method. The chemical method primarily uses lime mixed with ecological binders. The mechanical method combines vacuum preloading with vertical drains and jet grouting. The thermal method applies voltage to the soil, the analytical method utilizes software like PLAXIS for finite element method (FEM) generation, and the physicochemical method studies the effect of wetting and drying. The chosen method depends on various factors like construction time, budget, material availability, project scope, and type of structure.

Future research directions in this analysis include using biochar, polymers, biopolymers, geopolymers, biotechnology, organic and inorganic materials, and nanoclays for expansive clay soil improvement. New methodologies aim to minimize natural resource use by implementing waste materials like eggshell powder or rice husk powder. Advanced modeling techniques are being developed using updated technology and software, including numerical models (finite element method (FEM) or finite difference method (FDM)) and constitutive models (Mohr-Coulomb or Linear Elasticity).

This research identified current soil improvement methods for expansive clays, evaluated their effectiveness, and explored emerging techniques. This is crucial as population growth necessitates construction on problematic soils like expansive clays, and environmentally friendly improvement options are essential.

ACKNOWLEDGEMENT

The authors would like to express their gratitude to the master's program in Geotechnics at the Escuela Superior Politécnica del Litoral (ESPOL), to Ing. Joselyne Solórzano, M.Sc., Ing. Paúl Carrión, Ph.D., to the members of CIPAT for their support throughout this research, and to the research project "Proyecto de Gestión y Evaluación de la Investigación Científica en Ciencias de la Tierra, Economía, Administración y su vinculación con la Sociedad" (code CIPAT-7-2022) of ESPOL.

REFERENCES

- [1] B. P. Gradusov, "A tentative study of clay mineral distribution in soils of the world," *Geoderma*, vol. 12, no. 1–2, pp. 49–55, Aug. 1974, doi: 10.1016/0016-7061(74)90038-X.
- [2] M. G. Norton, "Clay—The Material of Life," in *Ten Materials That Shaped Our World*, Cham: Springer International Publishing, 2021, pp. 25–44. doi: 10.1007/978-3-030-75213-2_3.
- [3] S. C. Aboudi Mana, M. M. Hanafiah, and A. J. K. Chowdhury, "Environmental characteristics of clay and clay-based minerals," *Geol. Ecol. Landscapes*, vol. 1, no. 3, pp. 155–161, Jul. 2017, doi: 10.1080/24749508.2017.1361128.
- [4] J. L. Díaz-López, M. Cabrera, F. Agrela, and J. Rosales, "Geotechnical and engineering properties of expansive clayey soil stabilized with biomass ash and nanomaterials for its application in structural road layers," *Geomech. Energy Environ.*, vol. 36, p. 100496, Dec. 2023, doi: 10.1016/j.gete.2023.100496.
- [5] H. H. Murray, "Clays," in *Ullmann's Encyclopedia of Industrial Chemistry*, Wiley, 2006. doi: 10.1002/14356007.a07_109.pub2.
- [6] T. Tao, W. Shi, S. Xiong, F. Liang, and J. Zhang, "Experimental study on deformation and failure of a mining slope under the action of rainfall," *Can. Geotech. J.*, Dec. 2023, doi: 10.1139/cgj-2023-0298.
- [7] W. G. Holtz, "The influence of vegetation on the swelling and shrinking of clays in the United States of America," *Géotechnique*, vol. 33, no. 2, pp. 159–163, Jun. 1983, doi: 10.1680/geot.1983.33.2.159.
- [8] R. Bin Mostafiz, C. J. Friedland, R. V. Rohli, N. Bushra, and C. L. Held, "Property Risk Assessment for Expansive Soils in Louisiana," *Front. Built Environ.*, vol. 7, Oct. 2021, doi: 10.3389/fbuil.2021.754761.
- [9] R. Zhang, P. Tang, T. Lan, Z. Liu, and S. Ling, "Resilient and Sustainability Analysis of Flexible Supporting Structure of Expansive Soil Slope," *Sustainability*, vol. 14, no. 19, p. 12813, Oct. 2022, doi: 10.3390/su141912813.
- [10] M. M. A. L. N. Maheepala, M. C. M. Nasvi, D. J. Robert, C. Gunasekara, and L. C. Kurukulasuriya, "A comprehensive review on geotechnical properties of alkali activated binder treated expansive soil," *J. Clean. Prod.*, vol. 363, p. 132488, Aug. 2022, doi: 10.1016/j.jclepro.2022.132488.
- [11] A. Iravanian, Y. Kassem, and H. Gökçekuş, "Stress-strain behavior of modified expansive clay soil: experimental measurements and prediction models," *Environ. Earth Sci.*, vol. 81, no. 4, p. 107, Feb. 2022, doi: 10.1007/s12665-022-10229-8.
- [12] A. A. Fondjo, E. Theron, and R. P. Ray, "Stabilization of Expansive Soils Using Mechanical and Chemical Methods: A Comprehensive Review," *Civ. Eng. Archit.*, vol. 9, no. 5, pp. 1295–1308, Aug. 2021, doi: 10.13189/cea.2021.090503.
- [13] H. C. Scheuermann Filho, R. Beck Saldanha, C. Gravina da Rocha, and N. Cesar Consoli, "Sustainable Binders Stabilizing Dispersive Clay," *J. Mater. Civ. Eng.*, vol. 33, no. 3, Mar. 2021, doi: 10.1061/(ASCE)MT.1943-5533.0003595.
- [14] P. Badry, "Study on the Strength Behavior of Clay Blended with Nonwoven Surgical Masks Fabrics," 2024, pp. 103–114. doi: 10.1007/978-981-99-2676-3_9.
- [15] A. T. Sudjianto, A. Suraji, and S. H. Susilo, "Analysis of soil characteristics on expansive clay stabilization using shell ash," *Eastern-European J. Enterp. Technol.*, vol. 6, no. 6 (114), pp. 58–64, Dec. 2021, doi: 10.15587/1729-4061.2021.245533.
- [16] C. R. B. Baldin, M. Y. Kawanami, W. G. S. Costa, V. R. Bordignon, C. C. da Luz, and R. L. dos S. Izzo, "Mechanical properties of a clay soil reinforced with rice husk under drained and undrained conditions," *J. Rock Mech. Geotech. Eng.*, vol. 15, no. 10, pp. 2676–2686, Oct. 2023, doi: 10.1016/j.jrmge.2023.02.022.
- [17] R. M. Bakr, "Stabilization of Soft Clay Soil by Deep Mixing with Lime and Cement in the Presence of Salt Water," *Civ. Eng. Archit.*, vol. 12, no. 1, pp. 78–96, Jan. 2024, doi: 10.13189/cea.2024.120107.
- [18] E. Yaghoubi, M. Yaghoubi, M. Guerrieri, and N. Sudarsanan, "Improving expansive clay subgrades

- using recycled glass: Resilient modulus characteristics and pavement performance,” *Constr. Build. Mater.*, vol. 302, p. 124384, Oct. 2021, doi: 10.1016/j.conbuildmat.2021.124384.
- [19] Y. Huang and L. Wang, “Experimental studies on nanomaterials for soil improvement: a review,” *Environ. Earth Sci.*, vol. 75, no. 6, p. 497, Mar. 2016, doi: 10.1007/s12665-015-5118-8.
- [20] Y. Liu, K. Wu, and R. Zhao, “Bibliometric analysis of research on soil health from 1999 to 2018,” *J. Soils Sediments*, vol. 20, no. 3, pp. 1513–1525, Mar. 2020, doi: 10.1007/s11368-019-02519-9.
- [21] J. Solórzano, F. Morante-Carballo, N. Montalván-Burbano, J. Briones-Bitar, and P. Carrión-Mero, “A Systematic Review of the Relationship between Geotechnics and Disasters,” *Sustainability*, vol. 14, no. 19, p. 12835, Oct. 2022, doi: 10.3390/su141912835.
- [22] G. Herrera-Franco, B. Merchán-Sanmartín, J. Caicedo-Potosí, J. B. Bitar, E. Berrezueta, and P. Carrión-Mero, “A systematic review of coastal zone integrated waste management for sustainability strategies,” *Environ. Res.*, vol. 245, p. 117968, Mar. 2024, doi: 10.1016/j.envres.2023.117968.
- [23] N. Donthu, S. Kumar, D. Mukherjee, N. Pandey, and W. M. Lim, “How to conduct a bibliometric analysis: An overview and guidelines,” *J. Bus. Res.*, vol. 133, pp. 285–296, Sep. 2021, doi: 10.1016/j.jbusres.2021.04.070.
- [24] R. O’Dea *et al.*, “Preferred reporting items for systematic reviews and meta-analyses in ecology and evolutionary biology: a PRISMA extension,” *Biol. Rev.*, vol. 96, no. 5, pp. 1695–1722, Oct. 2021, doi: 10.1111/brv.12721.
- [25] D. V. Parums, “Editorial: Review Articles, Systematic Reviews, Meta-Analysis, and the Updated Preferred Reporting Items for Systematic Reviews and Meta-Analyses (PRISMA) 2020 Guidelines,” *Med. Sci. Monit.*, vol. 27, Aug. 2021, doi: 10.12659/MSM.934475.
- [26] J. Briones-Bitar, P. Carrión-Mero, N. Montalván-Burbano, and F. Morante-Carballo, “Rockfall Research: A Bibliometric Analysis and Future Trends,” *Geosciences*, vol. 10, no. 10, p. 403, Oct. 2020, doi: 10.3390/geosciences10100403.
- [27] F. Morante-Carballo, Lady Bravo-Montero, N. Montalván-Burbano, and P. Carrión-Mero, “Bibliometric Analysis of Earthquake Research in America: A Comparative Study Using Web of Science and Scopus Databases,” *Int. J. Saf. Secur. Eng.*, vol. 13, no. 5, pp. 965–973, Nov. 2023, doi: 10.18280/ijssse.130520.
- [28] G. Herrera-Franco *et al.*, “Bibliometric Analysis and Review of Low and Medium Enthalpy Geothermal Energy: Environmental, Economic, and Strategic Insights,” *Int. J. Energy Prod. Manag.*, vol. 8, no. 3, pp. 187–199, Sep. 2023, doi: 10.18280/ijepm.080307.
- [29] M. Hasan *et al.*, “Effect of optimum utilization of silica fume and eggshell ash to the engineering properties of expansive soil,” *J. Mater. Res. Technol.*, vol. 14, pp. 1401–1418, Sep. 2021, doi: 10.1016/j.jmrt.2021.07.023.
- [30] K. Wang, X. Zhang, C. Sun, K. Yang, J. Zheng, and J. Zhou, “Biochar application alters soil structure but not soil hydraulic conductivity of an expansive clayey soil under field conditions,” *J. Soils Sediments*, vol. 21, no. 1, pp. 73–82, Jan. 2021, doi: 10.1007/s11368-020-02786-x.
- [31] H. Karami, D. Robert, S. Costa, F. Tostovrsnik, B. O’donnell, and S. Setunge, “Construction of Working Platforms on Expansive Soils Using Recycled Concrete and Stabilizers: A Case Study,” 2021, pp. 19–30. doi: 10.1007/978-981-15-7222-7_3.
- [32] W. A. Roach, M. D. Glynne, W. B. Brierley, and E. M. Crowther, “Experiments on the Control of Wart Disease of Potatoes by Soil Treatment with Particular Reference to the Use of Sulphur,” *Ann. Appl. Biol.*, vol. 12, no. 2, pp. 152–190, May 1925, doi: 10.1111/j.1744-7348.1925.tb02261.x.
- [33] J. G. Bhatt and K. N. Indirakutty, “Salt uptake and salt tolerance by sunflower,” *Plant Soil*, vol. 39, no. 2, pp. 457–460, Oct. 1973, doi: 10.1007/BF00014816.
- [34] C. S. Oteo, R. Carrilero, and A. Pastor, “Failure in a tunnel excavated under an old riverbed in Madrid,” *Proc. Int. Congr. Tunnels Water. Water its Inflow. Des. Constr. Exploit. Tunn.*, vol. 1, pp. 565–571, 1988.
- [35] M. Terashi, M. Kitazume, and S. Minagawa, “Bearing Capacity of Improved Ground by Sand Compaction Piles,” in *Deep Foundation Improvements: Design, Construction, and Testing*, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, PO Box C700, West Conshohocken, PA 19428-2959: ASTM International, 1991, pp. 47–47–15. doi: 10.1520/STP25050S.
- [36] H. P. Hong and J. Q. Shang, “Probabilistic analysis of consolidation with prefabricated vertical drains for soil improvement,” *Can. Geotech. J.*, vol. 35, no. 4, pp. 666–667, 1998, doi: 10.1139/cgj-35-4-666.
- [37] A. S. Muntohar, G. Hantoro, Agus Setyo Muntohar, and G. Hantoro, “Influence of the Rice Husk Ash and Lime on Engineering Properties of Clayey Subgrade,” *Electron. J. Geotech. Eng.*, vol. 5, no. 10893032, 2000, [Online]. Available: https://dlwqtxts1lxzle7.cloudfront.net/59294732/Influence_of_the_rice_husk_ash_and_lime_on_engineering_properties_of_clayey_sub_grade20190517-119496-kvhy08.pdf?1558139587=&response-content-disposition=inline%3B+filename%3DInfluence_of_the_Rice_Husk_Ash_and
- [38] H. Tremblay, S. Leroueil, and J. Locat, “Mechanical improvement and vertical yield stress prediction of clayey soils from eastern Canada treated with lime or cement,” *Can. Geotech. J.*, vol. 38, no. 3, pp. 567–579, 2001, doi: 10.1139/cgj-38-3-567.
- [39] A. J. Puppala, G. S. Pillappa, L. R. Hoyos, D. Vasudev, and D. Devulapalli, “Comprehensive Field Studies to Address the Performance of Stabilized Expansive Clays,” *Transp. Res. Rec. J. Transp. Res. Board*, vol. 1989–2, no. 1, pp. 3–12, Jan. 2007, doi: 10.3141/1989-42.
- [40] J. M. Cumbers, E. M. Dornfest, D. D. Overton, and J. Harris, “Optimization of Compaction Grouting in Collapsible Soils,” in *Forensic Engineering 2009*, Nov. 2009, pp. 288–297. doi: 10.1061/41082(362)29.
- [41] A. A. Abiodun and Z. Nalbantoglu, “Lime pile techniques for the improvement of clay soils,” *Can. Geotech. J.*, vol. 52, no. 6, pp. 760–768, Jun. 2015,

- doi: 10.1139/cgj-2014-0073.
- [42] N. Hataf, P. Ghadir, and N. Ranjbar, "Investigation of soil stabilization using chitosan biopolymer," *J. Clean. Prod.*, vol. 170, pp. 1493–1500, Jan. 2018, doi: 10.1016/j.jclepro.2017.09.256.
- [43] Q. Wang *et al.*, "Impact of different mechanical soil preparation methods on physical and chemical properties of soil in low-lying paddy fields and rice yield," *Nongye Gongcheng Xuebao/Transactions Chinese Soc. Agric. Eng.*, vol. 35, no. 18, pp. 70–77, 2019, doi: 10.11975/j.issn.1002-6819.2019.18.009.
- [44] A. Gheris and A. Hamrouni, "Treatment of an expansive soil using vegetable (DISS) fibre," *Innov. Infrastruct. Solut.*, vol. 5, no. 1, p. 30, Apr. 2020, doi: 10.1007/s41062-020-0281-5.
- [45] F. Changizi and A. Haddad, "Improving the geotechnical properties of soft clay with nano-silica particles," *Proc. Inst. Civ. Eng. - Gr. Improv.*, vol. 170, no. 2, pp. 62–71, May 2017, doi: 10.1680/jgrim.15.00026.
- [46] L. Al-Subari, M. Hanafi, and A. Ekinici, "Effect of geosynthetic reinforcement on the bearing capacity of strip footing on sandy soil," *SN Appl. Sci.*, vol. 2, no. 9, p. 1484, Sep. 2020, doi: 10.1007/s42452-020-03261-5.
- [47] A. Meddah, A. E. Goufi, and L. Pantelidis, "Improving Very High Plastic Clays with the Combined Effect of Sand, Lime, and Polypropylene Fibers," *Appl. Sci.*, vol. 12, no. 19, p. 9924, Oct. 2022, doi: 10.3390/app12199924.
- [48] S. Shahsavani, A. H. Vakili, and M. Mokhberi, "The effect of wetting and drying cycles on the swelling-shrinkage behavior of the expansive soils improved by nanosilica and industrial waste," *Bull. Eng. Geol. Environ.*, vol. 79, no. 9, pp. 4765–4781, Nov. 2020, doi: 10.1007/s10064-020-01851-6.
- [49] K. C. Onyelowe, D. Bui Van, and M. Nguyen Van, "Swelling potential, shrinkage and durability of cemented and uncemented lateritic soils treated with CWC base geopolymer," *Int. J. Geotech. Eng.*, vol. 15, no. 4, pp. 389–404, Apr. 2021, doi: 10.1080/19386362.2018.1462606.
- [50] S. S. Sai Pratap Reddy, P. Kasaiah, M. Gopikrishna, and S. K. Vali Baba, "Load studies on granular pile with and without geogrid encasement in non-swelling clay beds," *Int. J. Civ. Eng. Technol.*, vol. 9, no. 7, pp. 766–773, 2018, [Online]. Available: <https://www.scopus.com/record/display.uri?eid=2-s2.0-85052012372&origin=inward&txGid=08976d9208e0762650f2502e28f0487a>
- [51] A. Widiyanti, "Utilization of Coir Fibers to Improve the Bearing Capacity and Tensile Strength of Expansive Clay," *Int. J. GEOMATE*, vol. 23, no. 95, Jul. 2022, doi: 10.21660/2022.95.16.
- [52] M. Tonini de Araújo, S. Tonatto Ferrazzo, G. J. Jordi Bruschi, and N. C. Consoli, "Mechanical and Environmental Performance of Eggshell Lime for Expansive Soils Improvement," *Transp. Geotech.*, vol. 31, p. 100681, Nov. 2021, doi: 10.1016/j.trgeo.2021.100681.
- [53] R. C. Joshi, G. S. Natt, and P. J. Wright, "Soil Improvement By Lime-Fly Ash Slurry Injection," *Proc. Int. Conf. Soil Mech. Found. Eng.*, vol. 3, pp. 707–712, 1981, [Online]. Available: <https://www.scopus.com/record/display.uri?eid=2-s2.0-0019657653&origin=inward&txGid=1d361798f2057bf3cbe9ac5984453eb2>
- [54] N. A. Odeh and A. H. J. Al-Rkaby, "Strength, Durability, and Microstructures characterization of sustainable geopolymer improved clayey soil," *Case Stud. Constr. Mater.*, vol. 16, p. e00988, Jun. 2022, doi: 10.1016/j.cscm.2022.e00988.
- [55] A. S. Soğancı, Y. Yenginar, and A. Orman, "Geotechnical Properties of Clayey Soils Stabilized with Marble Dust and Granulated Blast Furnace Slag," *KSCE J. Civ. Eng.*, vol. 27, no. 11, pp. 4622–4634, Nov. 2023, doi: 10.1007/s12205-023-0384-6.
- [56] F. Mousavi, E. Abdi, and S. A. Borz, "Forest Road Subgrade Improvement by Lime and Sodium Nanoalginate Used as Stabilizers for Clay Soils," *Forests*, vol. 14, no. 7, p. 1332, Jun. 2023, doi: 10.3390/f14071332.
- [57] S. M. Aggelides and P. A. Londra, "Effects of compost produced from town wastes and sewage sludge on the physical properties of a loamy and a clay soil," *Bioresour. Technol.*, vol. 71, no. 3, pp. 253–259, Feb. 2000, doi: 10.1016/S0960-8524(99)00074-7.
- [58] F. Caravaca, A. Lax, and J. Albaladejo, "Soil aggregate stability and organic matter in clay and fine silt fractions in urban refuse-amended semiarid soils," *Soil Sci. Soc. Am. J.*, vol. 65, no. 4, pp. 1235–1238, Jul. 2001, doi: 10.2136/sssaj2001.6541235x.
- [59] J. Wang, J. Ni, Y. Cai, H. Fu, and P. Wang, "Combination of vacuum preloading and lime treatment for improvement of dredged fill," *Eng. Geol.*, vol. 227, pp. 149–158, Sep. 2017, doi: 10.1016/j.enggeo.2017.02.013.
- [60] G. Cheng, H.-H. Zhu, Y.-N. Wen, B. Shi, and L. Gao, "Experimental Investigation of Consolidation Properties of Nano-Bentonite Mixed Clayey Soil," *Sustainability*, vol. 12, no. 2, p. 459, Jan. 2020, doi: 10.3390/su12020459.
- [61] K. Kannan, J. Bindu, and P. Vinod, "Engineering behaviour of MICP treated marine clays," *Mar. Georesources Geotechnol.*, vol. 38, no. 7, pp. 761–769, Aug. 2020, doi: 10.1080/1064119X.2020.1728791.
- [62] A. H. Saad, H. Nahazanan, Z. B. M. Yusoff, M. Mustafa, M. H. Elseknidy, and A. A. Mohammed, "Evaluating Biostabilization for Strength Improvement in Acidic Soil," *Appl. Sci.*, vol. 11, no. 22, p. 10817, Nov. 2021, doi: 10.3390/app112210817.
- [63] D. O. Pino-Herrera, Y. Pechaud, D. Huguenot, G. Esposito, E. D. van Hullebusch, and M. A. Oturan, "Removal mechanisms in aerobic slurry bioreactors for remediation of soils and sediments polluted with hydrophobic organic compounds: An overview," *J. Hazard. Mater.*, vol. 339, pp. 427–449, Oct. 2017, doi: 10.1016/j.jhazmat.2017.06.013.
- [64] J. Heikkinen *et al.*, "Possibilities to improve soil aggregate stability using biochars derived from various biomasses through slow pyrolysis, hydrothermal carbonization, or torrefaction," *Geoderma*, vol. 344, pp. 40–49, Jun. 2019, doi: 10.1016/j.geoderma.2019.02.028.
- [65] R. Alipour, J. Khazaei, M. S. Pakbaz, and A.

- Ghalandarzadeh, "Settlement control by deep and mass soil mixing in clayey soil," *Proc. Inst. Civ. Eng. - Geotech. Eng.*, vol. 170, no. 1, pp. 27–37, Feb. 2017, doi: 10.1680/jgeen.16.00008.
- [66] P. Tabatabaie Shourijeh, A. Masoudi Rad, F. Heydari Bahman Bigloo, and S. M. Binesh, "Application of recycled concrete aggregates for stabilization of clay reinforced with recycled tire polymer fibers and glass fibers," *Constr. Build. Mater.*, vol. 355, p. 129172, Nov. 2022, doi: 10.1016/j.conbuildmat.2022.129172.
- [67] H. M. Romiani, H. A. Keykha, M. Talebi, A. Asadi, and S. Kawasaki, "Green soil improvement: using carbon dioxide to enhance the behaviour of clay," *Proc. Inst. Civ. Eng. - Gr. Improv.*, vol. 176, no. 5, pp. 301–309, Nov. 2023, doi: 10.1680/jgrim.20.00073.
- [68] J.-J. Chen, L. Zhang, J.-F. Zhang, Y.-F. Zhu, and J.-H. Wang, "Field Tests, Modification, and Application of Deep Soil Mixing Method in Soft Clay," *J. Geotech. Geoenvironmental Eng.*, vol. 139, no. 1, pp. 24–34, Jan. 2013, doi: 10.1061/(ASCE)GT.1943-5606.0000746.
- [69] A. L. Ayodele, S. Pamukcu, R. A. Shrestha, and O. A. Agbede, "Electrochemical Soil Stabilization and Verification," *Geotech. Geol. Eng.*, Nov. 2017, doi: 10.1007/s10706-017-0392-8.
- [70] M. A. Sakr, M. A. Shahin, and Y. M. Metwally, "Utilization of Lime for Stabilizing Soft Clay Soil of High Organic Content," *Geotech. Geol. Eng.*, vol. 27, no. 1, pp. 105–113, Feb. 2009, doi: 10.1007/s10706-008-9215-2.
- [71] T. Maliakal and S. Thiyyakkandi, "Influence of Randomly Distributed Coir Fibers on Shear Strength of Clay," *Geotech. Geol. Eng.*, vol. 31, no. 2, pp. 425–433, Apr. 2013, doi: 10.1007/s10706-012-9595-1.
- [72] A. Kavak and F. Tüylüce, "Treatment of Marine Clay with Hydrated Lime and Quicklime," in *Lime: Building on the 100-Year Legacy of The ASTM Committee C07*, ASTM International 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959, 2012, pp. 90–105. doi: 10.1520/STP104450.
- [73] F. A. Kamaruddin, H. Nahazanan, B. Kim Huat, and V. Anggraini, "Improvement of Marine Clay Soil Using Lime and Alkaline Activation Stabilized with Inclusion of Treated Coir Fibre," *Appl. Sci.*, vol. 10, no. 6, p. 2129, Mar. 2020, doi: 10.3390/app10062129.
- [74] A. N. H. Hanis, A. T. Syahirah, A. Azura, and I. N. I. Najwa, "Plasticity and Strength Behaviour of Marine Clay Stabilized with Waste Steel Dust for Soil Improvement Works," *Key Eng. Mater.*, vol. 879, pp. 91–99, Mar. 2021, doi: 10.4028/www.scientific.net/KEM.879.91.
- [75] E. Lal Mohammadi, E. Khaksar Najafi, P. Zanganeh Ranjbar, M. Payan, R. Jamshidi Chenari, and B. Fatahi, "Recycling industrial alkaline solutions for soil stabilization by low-concentrated fly ash-based alkali cements," *Constr. Build. Mater.*, vol. 393, p. 132083, Aug. 2023, doi: 10.1016/j.conbuildmat.2023.132083.
- [76] M. R. Nematy, J. Caron, and J. Gallichand, "Using Paper De-inking Sludge to Maintain Soil Structural Form Field Measurements," *Soil Sci. Soc. Am. J.*, vol. 64, no. 1, pp. 275–285, Jan. 2000, doi: 10.2136/sssaj2000.641275x.
- [77] R. J. Farquharson, G. D. Schwenke, and J. D. Mullen, "Should we manage soil organic carbon in Vertosols in the northern grains region of Australia?," *Aust. J. Exp. Agric.*, vol. 43, no. 3, p. 261, 2003, doi: 10.1071/EA00163.
- [78] J.-L. Niqui-Arroyo, M. Bueno-Montes, R. Posada-Baquero, and J.-J. Ortega-Calvo, "Electrokinetic enhancement of phenanthrene biodegradation in creosote-polluted clay soil," *Environ. Pollut.*, vol. 142, no. 2, pp. 326–332, Jul. 2006, doi: 10.1016/j.envpol.2005.10.007.
- [79] A. Rittirong, R. S. Douglas, J. Q. Shang, and E. C. Lee, "Electrokinetic improvement of soft clay using electrical vertical drains," *Geosynth. Int.*, vol. 15, no. 5, pp. 369–381, Oct. 2008, doi: 10.1680/gein.2008.15.5.369.
- [80] Y. Z. Su, X. F. Wang, R. Yang, and J. Lee, "Effects of sandy desertified land rehabilitation on soil carbon sequestration and aggregation in an arid region in China," *J. Environ. Manage.*, vol. 91, no. 11, pp. 2109–2116, Nov. 2010, doi: 10.1016/j.jenvman.2009.12.014.
- [81] M. Ornek, M. Laman, A. Demir, and A. Yildiz, "Prediction of bearing capacity of circular footings on soft clay stabilized with granular soil," *Soils Found.*, vol. 52, no. 1, pp. 69–80, Feb. 2012, doi: 10.1016/j.sandf.2012.01.002.
- [82] J. De Rosa, D. M. Pontolillo, C. Di Maio, and R. Vassallo, "Chemical Clay Soil Improvement: From Laboratory to Field Test," *Procedia Eng.*, vol. 158, pp. 284–289, 2016, doi: 10.1016/j.proeng.2016.08.443.
- [83] R. Noorzad and S. Motevalian, "Improvement of Clayey Soil with Lime and Industrial Sludge," *Geotech. Geol. Eng.*, vol. 36, no. 5, pp. 2957–2966, Oct. 2018, doi: 10.1007/s10706-018-0515-x.
- [84] A. Hanna, M. Khalifa, and M. A. Rahman, "Experimental Investigation on Stone Columns in Cohesive Soil," 2019, pp. 171–181. doi: 10.1007/978-3-030-01917-4_14.
- [85] J. Zhang, J. E. Amonette, and M. Flury, "Effect of biochar and biochar particle size on plant-available water of sand, silt loam, and clay soil," *Soil Tillage Res.*, vol. 212, p. 104992, Aug. 2021, doi: 10.1016/j.still.2021.104992.
- [86] N. Khorram and A. M. Rajabi, "Strength properties and microstructural characteristics of clay treated with alkali activated mortar and fiber," *Constr. Build. Mater.*, vol. 341, p. 127486, Jul. 2022, doi: 10.1016/j.conbuildmat.2022.127486.
- [87] P. Kulanthaivel, B. Soundara, S. Selvakumar, and A. Das, "Effect of bio-cementation on the strength behaviour of clay soils using egg shell as calcium source," *Environ. Earth Sci.*, vol. 81, no. 13, p. 348, Jul. 2022, doi: 10.1007/s12665-022-10475-w.
- [88] M. Cinar, "Investigation of Mechanical and Physical Features of Cementitious Jet Grout Applications for Various Soil Types," *Buildings*, vol. 13, no. 11, p. 2833, Nov. 2023, doi: 10.3390/buildings13112833.
- [89] H. H. Abdullah and M. A. Shahin, "Geomechanical Properties of Clay Stabilised with Fly Ash-Based Geopolymer Subjected to Long-Term Sulfate Attack," *Int. J. Geosynth. Gr. Eng.*, vol. 9, no. 6, p. 75, Dec. 2023, doi: 10.1007/s40891-023-00493-4.
- [90] J. J. T. Sanchez, D. X. R. Flores, J. C. C. Gutierrez, E. O. G. Tolentino, I. Y. P. Morejón, and N. I. V.

- Montoya, "Subgrade Improvement with Recycled Polymer (PET) in Clay Soils for Rural Roads," *Civ. Eng. Archit.*, vol. 11, no. 5A, pp. 2936–2949, Sep. 2023, doi: 10.13189/cea.2023.110810.
- [91] A. Farshadi, H. Mehrnahad, and M. Abdoli, "Effects of glass fibers and nanoclay on the strength parameters of aeolian sand: an experimental study," *Bull. Eng. Geol. Environ.*, vol. 82, no. 7, p. 278, Jul. 2023, doi: 10.1007/s10064-023-03317-x.
- [92] W. Meyer, H. Barrs, R. Smith, N. White, A. Heritage, and D. Short, "Effect of irrigation on soil oxygen status and root and shoot growth of wheat in a clay soil," *Aust. J. Agric. Res.*, vol. 36, no. 2, p. 171, 1985, doi: 10.1071/AR9850171.
- [93] S. Tampouris, N. Papassiopi, and I. Paspaliaris, "Removal of contaminant metals from fine grained soils, using agglomeration, chloride solutions and pile leaching techniques," *J. Hazard. Mater.*, vol. 84, no. 2–3, pp. 297–319, Jun. 2001, doi: 10.1016/S0304-3894(01)00233-3.
- [94] N. C. Consoli, L. da Silva Lopes, and K. S. Heineck, "Key Parameters for the Strength Control of Lime Stabilized Soils," *J. Mater. Civ. Eng.*, vol. 21, no. 5, pp. 210–216, May 2009, doi: 10.1061/(ASCE)0899-1561(2009)21:5(210).
- [95] R. P. Munirwan, Munirwansyah, Marwan, P. J. Ramadhansyah, and V. Kamchoom, "Performance of Coir Fiber Addition for Clay as a Sub-Grade for Pavement Design," *IOP Conf. Ser. Mater. Sci. Eng.*, vol. 712, no. 1, p. 012009, Jan. 2020, doi: 10.1088/1757-899X/712/1/012009.
- [96] M. Brtnicky *et al.*, "A critical review of the possible adverse effects of biochar in the soil environment," *Sci. Total Environ.*, vol. 796, p. 148756, Nov. 2021, doi: 10.1016/j.scitotenv.2021.148756.
- [97] M.-Y. Li, W.-J. Sun, Y.-J. Wang, D.-A. Sun, and Y.-Z. Tan, "Air permeability of biochar-amended clay cover," *Arab. J. Geosci.*, vol. 14, no. 8, p. 732, Apr. 2021, doi: 10.1007/s12517-021-06988-6.
- [98] U. Ali *et al.*, "Potential of organic and inorganic amendments for stabilizing nickel in acidic soil, and improving the nutritional quality of spinach," *Environ. Sci. Pollut. Res.*, vol. 28, no. 41, pp. 57769–57780, Nov. 2021, doi: 10.1007/s11356-021-14611-0.
- [99] S. Wang, Q. Xue, W. Ma, K. Zhao, and Z. Wu, "Experimental study on mechanical properties of fiber-reinforced and geopolymer-stabilized clay soil," *Constr. Build. Mater.*, vol. 272, p. 121914, Feb. 2021, doi: 10.1016/j.conbuildmat.2020.121914.
- [100] W. Huang, J. Du, H. Sun, C. Zhou, Z. Liu, and L. Zhang, "New polymer composites improve silty clay soil microstructure: an evaluation using ^{29}Si NMR," *L. Degrad. Dev.*, vol. 32, no. 11, pp. 3272–3281, Jul. 2021, doi: 10.1002/ldr.3983.
- [101] H. H. Baqir, K. Y.H.AL-Soudany, and A. S. A. Al-Gharbawi, "Clay Columns Stabilized with Fly Ash in Soft Soils," *IOP Conf. Ser. Mater. Sci. Eng.*, vol. 737, no. 1, p. 012095, Feb. 2020, doi: 10.1088/1757-899X/737/1/012095.
- [102] M. Bahador and A. Pak, "Small-Strain Shear Modulus of Cement-Admixed Kaolinite," *Geotech. Geol. Eng.*, vol. 30, no. 1, pp. 163–171, Feb. 2012, doi: 10.1007/s10706-011-9458-1.
- [103] K. Divya Krishnan, P. T. Ravichandran, and P. Sreekanth Reddy, "Strength and Swelling Characteristics of Expansive Soils Treated with Calcium Carbide Residue," 2019, pp. 73–78. doi: 10.1007/978-981-13-2182-5_7.
- [104] X. Zhang, J. Chen, M. Tan, and Y. Sun, "Assessing the impact of urban sprawl on soil resources of Nanjing city using satellite images and digital soil databases," *CATENA*, vol. 69, no. 1, pp. 16–30, Jan. 2007, doi: 10.1016/j.catena.2006.04.020.
- [105] N. Munazah, T. Uzma, and A. Shaista, "Environmental Pollution and Sustainable Development in Developing Countries," *JSTOR*, vol. 55, pp. 589–604, 2016, doi: 44986005.
- [106] Z. He, M. Zhang, and M. J. Wilson, "Distribution and Classification of Red Soils in China," in *The Red Soils of China*, Dordrecht: Springer Netherlands, 2004, pp. 29–33. doi: 10.1007/978-1-4020-2138-1_3.
- [107] G. Cai, T. Zhang, A. J. Puppala, and S. Liu, "Thermal characterization and prediction model of typical soils in Nanjing area of China," *Eng. Geol.*, vol. 191, pp. 23–30, May 2015, doi: 10.1016/j.enggeo.2015.03.005.
- [108] B. E. Suther, D. S. Leigh, and L. T. West, "Soil Chemistry and Clay Mineralogy of an Alluvial Chronosequence from the North Carolina Sandhills of the Upper Coastal Plain, USA," *Soil Syst.*, vol. 6, no. 1, p. 1, Dec. 2021, doi: 10.3390/soilsystems6010001.
- [109] C. M. Ogg *et al.*, "Polygenesis and cementation pathways for plinthic and non-plinthic soils on the Upper Coastal Plain, South Carolina," *Geoderma*, vol. 427, p. 116130, Dec. 2022, doi: 10.1016/j.geoderma.2022.116130.
- [110] R. Bulko and S. Masarovičová, "Effect of Lime Filling on the Compactibility of Clay Soils," *Civ. Environ. Eng.*, vol. 18, no. 2, pp. 501–506, Dec. 2022, doi: 10.2478/cee-2022-0047.
- [111] K. N. Mohd Yusof, F. Ahmad, M. M. A. B. Abdullah, and M. F. Mohd Tahir, "Effects of Electro Osmotic Consolidation in South West of Johor: Small Laboratory Scale," *Mater. Sci. Forum*, vol. 803, pp. 255–264, Aug. 2014, doi: 10.4028/www.scientific.net/MSF.803.255.

CERTIFICACIÓN DE REVISIÓN DE PROYECTO DE TITULACIÓN

Por medio de la presente, Yo Davide Besenzon Venegas, Coordinador del Programa de Maestría en Geotecnia de la Escuela Superior Politécnica del Litoral (ESPOL), certifico que:

Con fecha 30 de enero de 2024, la estudiante María Gabriela Chucuyán Pérez con número de identificación 0925371064, de la Cohorte 5, presentó la propuesta de su tema de titulación al Comité Académico del programa. Posteriormente, con fecha 22 de abril de 2024, el Comité revisó y aprobó la propuesta mediante la FICT-CA-GEOTEC-005-2024, cumpliendo con los requisitos establecidos para la aprobación del tema.

A partir de dicha aprobación, la estudiante mantuvo reuniones periódicas con el tutor designado, Paúl César Carrión Mero, para la elaboración y desarrollo de su proyecto de titulación, siguiendo los lineamientos establecidos por el programa. Con fecha 08 de mayo de 2024, la estudiante presentó y sustentó su proyecto de titulación ante el tribunal evaluador asignado, cumpliendo con el proceso formal de evaluación académica.

Por lo tanto, en calidad de Coordinador del Programa de Maestría en Geotecnia, certifico que el trabajo de titulación denominado "**Revisión sistemática en base científica Scopus de soluciones de mejoramiento en suelos con arcillas expansivas**", realizado la estudiante María Gabriela Chucuyán Pérez con número de identificación 0925371064, ha sido revisado y evaluado conforme a los lineamientos y estándares establecidos por el programa.

Debido a circunstancias externas, no ha sido posible obtener las firmas de los involucrados (estudiante, tutor(es) y/o evaluadores). No obstante, en calidad de Coordinador del Programa, certifico que el proyecto cumple con los requisitos académicos y ha sido revisado para su presentación y archivo institucional.

Atentamente,



M. Sc. Davide Besenzon Venegas
Coordinador de la Maestría en Geotecnia